


Concord™



Pictured in a White finish with Duraflect® copper-free mirror

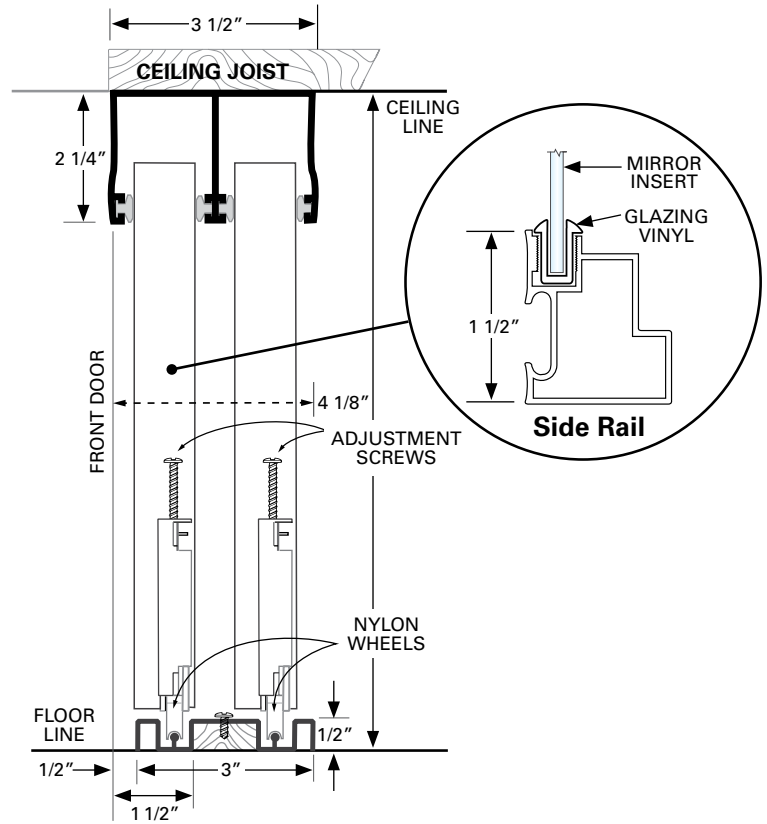

Technical Illustration

Finishes:

- Bright Clear, Bright Gold, Bronze, Brushed Nickel, Satin Clear, Satin Gold and White (High-Gloss)

Insert Type:

- 3mm Duraflect® copper-free mirror
 - » Elimination of copper dramatically improves quality and life expectancy
 - » This creates a durable, superior grade mirror with exceptional quality

Frame Type:

- 1 1/2" wide heavy-duty commercial quality anodized aluminum frame

Track and Channel:

- Aluminum track and channel
- Ultraglide® 2 1/4" deep felt-lined top channel
- Bottom rolled with jump-proof track
- Top channel and bottom track with finish to match

Product Details:

- 1 1/2" diameter wheels with hardened steel races and 5/32" ball bearings in extra-heavy 18 gauge steel housing
- Heavy gauge 6063 extrusions (6463 is polished for bright colors)
- Side rails are hollow extrusions (tubular) for added strength
- Integrated handle in side rail
- Color coordinated glazing vinyl
- Duraflect® copper-free mirror panel has 400lb category II safety backing

Sizes:

- Standard sizes
 - » Width: 48", 60", 72", 84", 96", 108", 120", 144", 168" and 192"
 - » Height: 81" and 96"
- Custom sizes
 - » Maximum individual panel width is 60"
 - » Maximum opening height is 120"
- Adjustment range for opening height is up or down 1/2"

Optional Upgrades:

- 1" bevel all
- Polished or 1/2" beveled mirror fascia
- Decorative back painted glass inserts
- Decorative mirror inserts
- Decorative wood grain inserts
- True divided lite configurations
- One piece Ultraglide® triple track and channel up to 288"
- Face beveling design (v-groove)

